


Product data sheet

Characteristics

QO120L125PG

Load center, QO, 1 phase, 20 spaces, 24 circuits, 125A convertible main lugs, PoN, NEMA1, gnd bar, UL

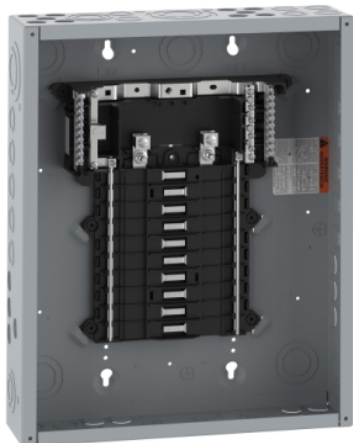

Main

Marketing Trade Name	QO
Product Type	Load Center
Provided Equipment	Grounding bar

Complementary

Tightening Torque	Cover 20 lb.in
Load Center Type	Main lugs
Rated Current	125 A
Number of Spaces	20
Max Short Circuit Current Rating	65 kA
Maximum Number of Single Pole Circuits	24
Maximum Number of Tandem Breakers	4
Number of Phases	1 phase
Ground Bar	Grounding bar included (not installed)
Box Number	6
Height	17.91 in (455 mm)
Width	14.25 in (362 mm)
Depth	3.74 in (95 mm)
Net Weight	11.79 lb(US) (5.350 kg)

Environment

Enclosure Rating	NEMA 1 indoor
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

Ordering and shipping details

Category	10003-QO PON 1PH LC,12-60 CKT, ML N1
Discount Schedule	DE3A
GTIN	785901609407
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	19.00 in (48.26 cm)
Number of Units in Package 1	1
Package 1 Width	14.50 in (36.83 cm)
Package 1 Height	4.20 in (10.67 cm)
Package 1 Weight	11.64 lb(US) (5.28 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile