



# T5 High Output

## F39T5/835/HO/ALTO 40PK

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

### Warnings and Safety

- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

General information	
Base	G5 [ G5]
Life to 50% Failures Preheat (Nom)	30000 h
Features	HO Alto® [ High Output Alto]
System Description	High Output (HO)
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %
Light technical	
Color Code	835 [ CCT of 3500K]
Initial lumen (Nom)	3500 lm
Luminous Flux (Rated) (Nom)	3100 lm
Color Designation	White (WH)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	92 lm/W
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	82 lm/W

Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

### Operating and electrical

Power (Rated) (Nom)	38.0 W
Lamp Current (Nom)	0.325 A

### Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

## T5 High Output

### Controls and dimming

Dimmable	Yes
----------	-----

### Mechanical and housing

Cap-Base Information	Green [ Green Cap]
Bulb Shape	T5 [ 16 mm (T5)]

### Approval and application


Mercury (Hg) Content (Nom)	1.4 mg
----------------------------	--------

### Product data

Order product name	39W/835 Min Bipin T5 HO ALTO UNP
--------------------	----------------------------------

EAN/UPC - Product	046677290238
Order code	290239
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927992683522
Net Weight (Piece)	78.000 g
ILCOS Code	FDH-39/35/1B-L/P-G5-16/850


## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
39W/835 Min Bipin T5 HO	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
ALTO UNP					

39W/835 Min Bipin T5 HO ALTO UNP

## Photometric data


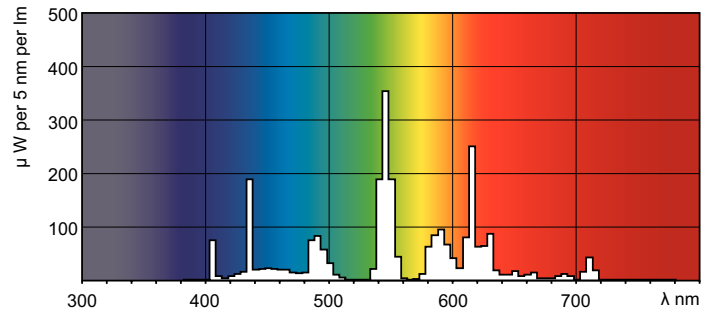


LDPB\_TL5-HO8\_835-Spectral power distribution B/W

LDPO\_TL5-HO8\_835-Spectral power distribution Colour


# T5 High Output

## Lifetime

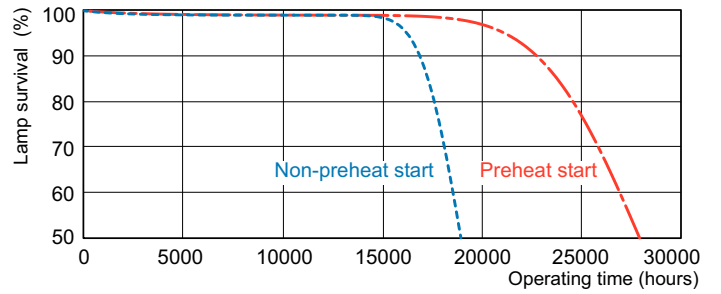

LDLE\_TL5-HO8\_0001-Life expectancy diagram

LDLE\_TL5-HO8\_0002-Life expectancy diagram

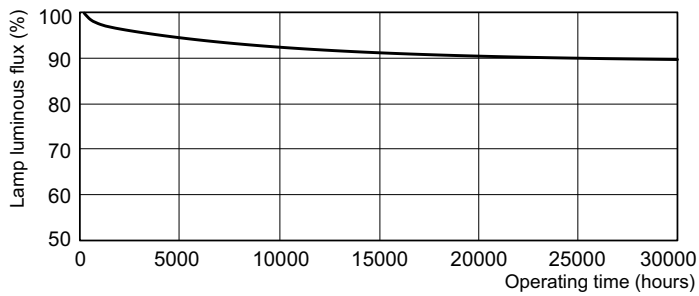

LDLM\_TL5-HO8\_0001-Lumen maintenance diagram

