

Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 60A, 3 pole, 30HP at 575VAC, 3 phase, 110/120VAC 50/60Hz coil, open

8910DPA63V02

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------|----------------------------|
| Product or Component Type | Definite Purpose Contactor |
| Line Rated Current | 60 A |
| Number of Poles | 3P |
| Pole contact composition | 3 NO |
| Range of Product | DPA |

Complementary

| | |
|--------------------------------|--|
| Maximum Horse Power Rating | 5 hp 115 V AC, 1 phase 10 hp 230 V AC, 1 phase 30 hp 460 V AC, 3 phase 30 hp 575 V AC, 3 phase 25 hp 230 V AC, 3 phase |
| Locked rotor rated current | 360 A 277 V AC 300 A 460 V AC 240 A 575 V AC |
| [Ue] rated operational voltage | 600 V AC |
| [Uc] control circuit voltage | 120 V AC 60 Hz 110 V AC 50 Hz |
| Phase | 3 phase |
| Electrical Connection | Quick connect terminals Box lugs |
| Height | 4.13 in (104.90 mm) 4.1 in (105 mm) |
| Width | 2.56 in (65.02 mm) 2.6 in (65 mm) |
| Depth | 3.67 in (93.22 mm) 3.7 in (93 mm) |
| Product Weight | 1.50 lb(US) (0.68 kg) 1.5 lb(US) (0.7 kg) |

Environment

| | |
|------------------------|----------------------|
| Product Certifications | UL Recognized CSA |
|------------------------|----------------------|

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US1CP1B21346 |
| Discount Schedule | CP1B |
| GTIN | 785901080817 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|---------------|-----|
| Returnability | Yes |
|---------------|-----|

| | |
|-------------------|----|
| Country of origin | US |
|-------------------|----|

Packing Units

| | |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
|------------------------|-----|

| | |
|------------------------------|---|
| Number of Units in Package 1 | 1 |
|------------------------------|---|

| | |
|------------------|--------------------|
| Package 1 Height | 2.90 in (7.366 cm) |
|------------------|--------------------|

| | |
|-----------------|---------------------|
| Package 1 Width | 4.90 in (12.446 cm) |
|-----------------|---------------------|

| | |
|------------------|---------------------|
| Package 1 Length | 4.10 in (10.414 cm) |
|------------------|---------------------|

| | |
|------------------|-----------------------|
| Package 1 Weight | 24.160 oz (684.924 g) |
|------------------|-----------------------|

| | |
|------------------------|-----|
| Unit Type of Package 2 | CAR |
|------------------------|-----|

| | |
|------------------------------|---|
| Number of Units in Package 2 | 8 |
|------------------------------|---|

| | |
|------------------|---------------------|
| Package 2 Height | 8.10 in (20.574 cm) |
|------------------|---------------------|

| | |
|-----------------|---------------------|
| Package 2 Width | 5.80 in (14.732 cm) |
|-----------------|---------------------|

| | |
|------------------|---------------------|
| Package 2 Length | 9.00 in (22.860 cm) |
|------------------|---------------------|

| | |
|------------------|--------------------------|
| Package 2 Weight | 12.350 lb(US) (5.602 kg) |
|------------------|--------------------------|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.


[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


|  Materials and Substances | |
|---|--------------------------------------|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Compliant with Exemptions |
| SCIP Number | 9635bca0-88f5-4211-aaa3-d012e1850a41 |

Use Again

|  Repack and remanufacture | |
|---|--|
| Circularity Profile | No need of specific recycling operations |
| Take-back | No |

Dimensions Drawings

Approximate Dimensions

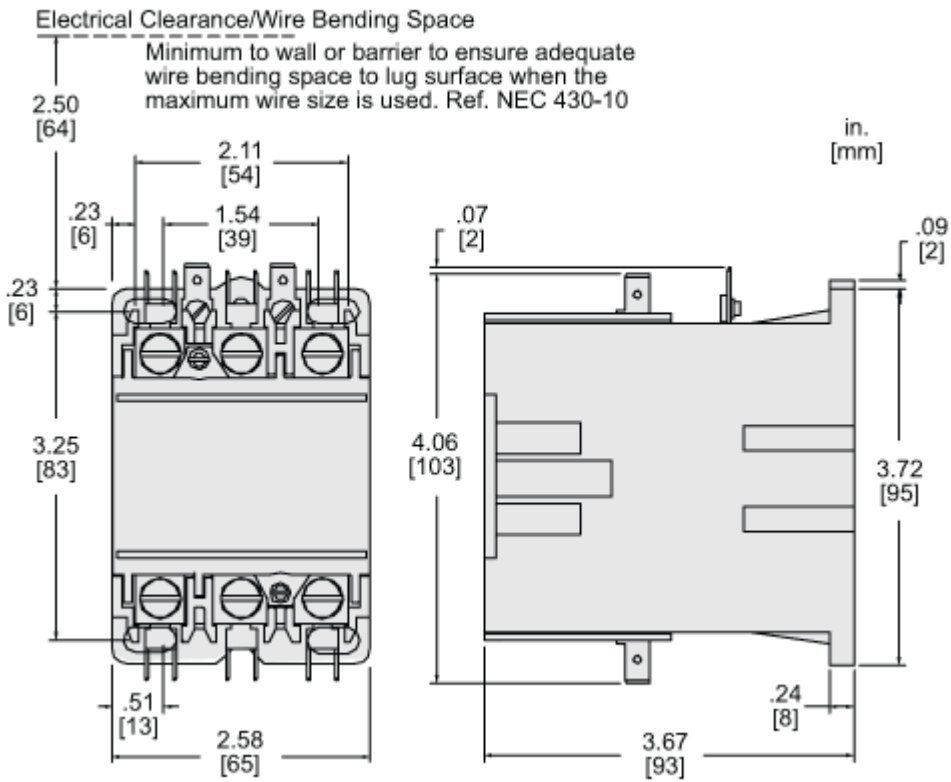

Technical Illustration

Wiring diagram

