




# KA40U2N, Aluminum Universal Terminal, 2 Hole, 300-800 kcmil, 1/2" Stud, 1.75" Stud Hole Spacing, 1 Screw, Al/Cu Rated, Tin Plated.

By Burndy  
Catalog # [KA40U2N](#)

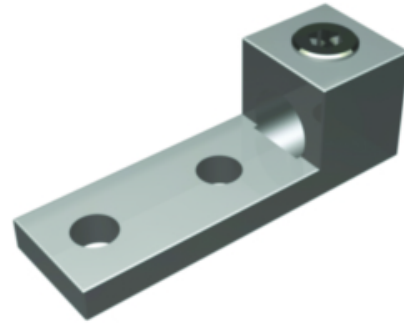

Aluminum Universal Terminal, 2 Hole, 300-800 kcmil, 1/2" Stud, 1.75" Stud Hole Spacing, 1 Screw, Al/Cu Rated, Tin Plated.

## Application

For Aluminum and Copper Conductors

## General

Connector Type	Terminal
EU RoHS Indicator	Yes
Installation Torque Recommended in-lb	500 LBS/in
Material	Aluminum
Material - Hardware	Aluminum
Physical Attribute - Number of Holes	2
Physical Attribute - Number of Screws	1
Physical Attribute - Screw Type	Allen
Plated	Y
Plating Type	Tin
Sub Brand	UNIVERSAL TERM
Type	Bolted Lugs & Terminals
UPC	781810370452

## Dimensions

Dimension - Bolt Hole Size inch	0.50 in
Dimension - Bolt Size fraction	1/2
Dimension - D inch	3.03 in
Dimension - Height inch	1.95 in
Dimension - Hole Size inch	0.56 in
Dimension - Hole Size mm	14 mm
Dimension - L Length Overall mm	121 mm
Dimension - Length Overall inch	4.75 in
Dimension - N inch	0.63 in
Dimension - Pad Width inch	1.77 in
Dimension - Stud Size inch	1/2
Dimension - Width fraction	1-3/4 in
Dimension - Width inch	1.75 in
Dimension - Width mm	44 mm

## Conductor Related

Conductor - AL Str Size	300 kcmil;336 kcmil;350 kcmil;397 kcmil;400 kcmil;450 kcmil;477 kcmil;500 kcmil;550 kcmil;556 kcmil;600 kcmil;636 kcmil;650 kcmil;700 kcmil;715 kcmil;750 kcmil;795 kcmil;800 kcmil
Conductor - AL Str Size Range	300 kcmil-800 kcmil
Conductor - Copper Str Size	300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil;550 kcmil;600 kcmil;700 kcmil;750 kcmil;800 kcmil
Conductor - Copper Str Size Range	300 kcmil-800 kcmil
Conductor Size	300-800 KCMIL
Conductor Type	<ul style="list-style-type: none"> <li>• CU C Str-Size</li> <li>• AL C Str-Size</li> </ul>
Number Of Conductors	1

## Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Listed Direct Burial	No
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL 486A-486B
Standards - Industry Standards Met	UL 486A-486B
Standards - RoHS Compliance Status	EX
UL Listed	Yes

## Logistics

Carton Quantity	54
Minimum Pack Quantity	1

## Product Assets

- [3D Models - KA40U2N\\_MODEL-PDF](#)
- [3D Models - KA40U2N\\_MODEL-STEP](#)
- [3D Models - KA40U2N\\_MODEL-IGES](#)
- [Catalogs - Full Line BURNDY Catalog](#)
- [Customer Notices - Prop 65 Notice](#)
- [Sales Drawings - se210997](#)



A proud member of the Hubbell Family.

©2024 Hubbell Incorporated. All rights reserved.  
BRDY-KA40U2N-SPEC-EN | REV 1/2024