


1243-I

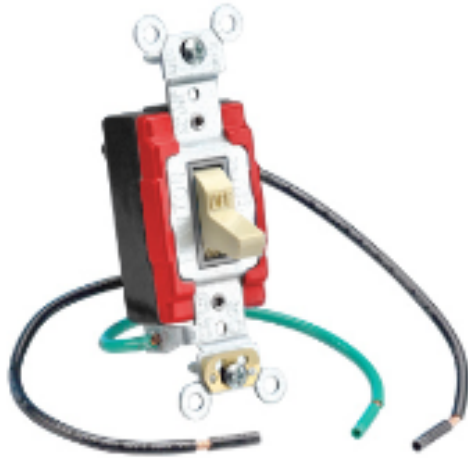

UPC Code: 07847733383

Country Of Origin: Mexico

Brand Features

Leviton's Commercial Specification Grade switches are designed to offer outstanding reliability and top performance in commercial settings. Ideal applications include municipal facilities, government buildings, malls, department stores, hospital and health care facilities, office buildings, schools, colleges, universities, houses of worship and cultural institutions. Leviton offers a large selection of 15 and 20 Amp Commercial switches, available in a wide variety of colors, wiring options and other features.

Item Description

20 Amp, 120/277 Volt, Toggle Pigtail Single-Pole AC Quiet Switch, Heavy Duty Spec Grade, Grounding, Wire lead 6-Inch Wired - IVORY

Technical Information

AC Horsepower Ratings

HP Rating: 1/2HP-120V 2HP-240V-277V

Electrical Specifications

Amperage: 20 A

Voltage: 120/277 VAC

Max. Amperage: 12 Amp

Dielectric Voltage Withstand: 1500V minimum

Maximum Working Voltage: 120/277 VAC as rated

Current Interrupting: Certified for current interrupting at full rated current

Temperature Rise: Maximum 30 degrees C rise

Grounding: Self-Grounding

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 65°C

Material Specifications

Body Material: Thermoplastic

Strap Material: .048" Thick Galvanized Steel

Cover Material: Urea

Base Material: Urea

Mounting Strap: Steel

Actuator Material: Thermoplastic

Terminal Leads: 6", #12 AWG THHN

Grounding Leads: 6", #12 AWG THHN

Mounting Screws: Triple Combination Head, Steel

Termination: Pre-Wired Leads

Contacts: Silver-Cadmium .031 Thick

Color: Ivory

Mechanical Specifications

Lead Identification: Leads identified in accordance with UL 498 (black, white & green)

Product ID: Ratings are permanently marked on device

Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd

Terminal Accom.: 14-10 AWG

Torque Range: 12-14 inch pounds

Termination: Pre-Wired Leads

Product Features

Color: Ivory

Grade: Extra Heavy-Duty Industrial Specification Grade

Function: Single-Pole

Device Type: Toggle Switch

Standards and Certifications

NEMA: WD-1 & WD-6

ANSI: C-73

UL Standard: UL 20

CSA C22.2 No. 111: File #152105

NOM: 057

Warranty: 2 Year Limited

UL Fed Spec WS896E: File #E7458



SINGLE-POLE

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

