



PL-C Cluster 4-Pin Base

PL-C 13W/835/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information	
Base	G24Q-1 [G24q-1]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %
Light Technical	
Color Code	835 [CCT of 3500K]
Initial lumen (Nom)	925 lm
Luminous Flux (Rated) (Nom)	925 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	69 lm/W
Color Rendering Index (Nom)	82


LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	13.0 W
Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	Yes

PL-C Cluster 4-Pin Base

Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label (EEL)	А
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	15 kWh
Product Data	
Order product name	PL-C 13W/835/4P/ALTO 10PK

EAN/UPC - Product	046677237745
Order code	383273
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927907183530
Net Weight (Piece)	49.900 g


Dimensional drawing



PL-C ALTO 13W/835/4P

Photometric data

PL-C 13W/835/4P/ALTO 10PK 27.1 mm 27.1 mm 97.5 mm 117.0 mm 131.9 m	Product	D (max)	D1 (max)	A (max)	B (max)	C (max)	
	PL-C 13W/835/4P/ALTO 10PK	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm	

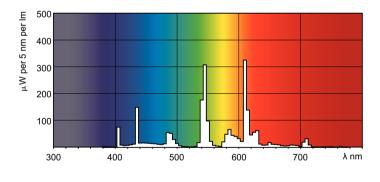


LDPB_PLC4P_835-Spectral power distribution B/W

LDPO_PLC4P_835-Spectral power distribution Colour

PL-C Cluster 4-Pin Base

Lifetime

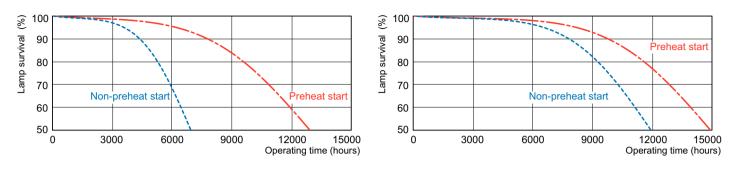



☐ 100 IN			
8 100			
<u> </u>			
	Į.	1	

LDLE_PLC4P_0002-Life expectancy diagram

LDLM_PLC4P_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, November 18 - data subject to change