



Large size ceiling mount fixture: 26 - 52 Watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

Color: Clear

Weight: 6.6 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Lamp Info

Type	2-26W Triple
Watts	52W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	12,000
Lamp Lumens	3,600
Efficacy	N/A

### Ballast Info

Type	Elec HPF QT
120V	0.46A
208V	N/A
240V	N/A
277V	0.21A
Input Watts	N/A

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

### Electrical

#### Sockets:

Plug-in type, thermoplastic

#### Photocell:

See product number VAN4F52QT/PC

### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

### Optical

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

### Construction

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

### Ballast Minimum Starting Temperature:


0°F

### Other

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

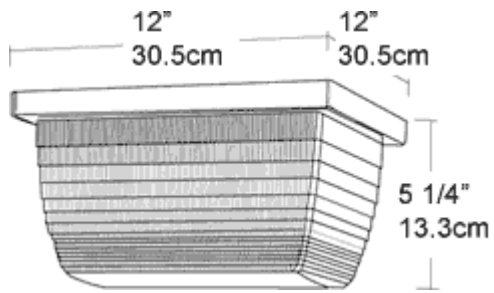

## Features

- Backboxes available for conduit entry
- Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied
- Tough polycarbonate refractor