

Product availability : Stock - Normally stocked in distribution facility



Price* : 385.10 USD



Main

Range of product	TeSys D
Range	TeSys
Product name	TeSys D
Product or component type	Reversing contactor
Device short name	LC2D
Contactor application	Resistive load Motor control
Utilisation category	AC-1 AC-3
Device presentation	Preassembled with reversing power busbar
Poles description	3P
Pole contact composition	3 NO
System Voltage	<= 300 V DC power circuit <= 690 V AC 25...400 Hz power circuit
[Ie] rated operational current	25 A (<= 140 °F (60 °C)) at <= 440 V AC AC-3 power circuit 40 A (<= 140 °F (60 °C)) at <= 440 V AC AC-1 power circuit
Motor power kW	11 kW at 380...400 V AC 50/60 Hz 15 kW at 500 V AC 50/60 Hz 15 kW at 660...690 V AC 50/60 Hz 5.5 kW at 220...230 V AC 50/60 Hz 11 kW at 415...440 V AC 50/60 Hz
Motor power hp	2 hp at 115 V AC 50/60 Hz 1 phase motors 3 hp at 230/240 V AC 50/60 Hz 1 phase motors 5 hp at 200/208 V AC 50/60 Hz 3 phases motors 7.5 hp at 230/240 V AC 50/60 Hz 3 phases motors 15 hp at 460/480 V AC 50/60 Hz 3 phases motors 20 hp at 575/600 V AC 50/60 Hz 3 phases motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	110 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947

Overvoltage category	III
[Ith] conventional free air thermal current	40 A at $\leq 140^{\circ}\text{F}$ (60°C) power circuit 10 A at $\leq 140^{\circ}\text{F}$ (60°C) signalling circuit
Irms rated making capacity	450 A at 440 V power circuit conforming to IEC 60947 140 A AC signalling circuit conforming to IEC 60947-5-1 250 A DC signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	450 A at 440 V power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	120 A $\leq 104^{\circ}\text{F}$ (40°C) 1 min power circuit 240 A $\leq 104^{\circ}\text{F}$ (40°C) 10 s power circuit 380 A $\leq 104^{\circ}\text{F}$ (40°C) 1 s power circuit 50 A $\leq 104^{\circ}\text{F}$ (40°C) 10 min power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	40 A gG at $\leq 690\text{ V}$ coordination type 2 power circuit 63 A gG at $\leq 690\text{ V}$ coordination type 1 power circuit 10 A gG signalling circuit conforming to IEC 60947-5-1
Average impedance	2 mOhm at 50 Hz - Ith 40 A power circuit
[Ui] rated insulation voltage	600 V power circuit certifications CSA 600 V power circuit certifications UL 690 V power circuit conforming to IEC 60947-4-1 690 V signalling circuit conforming to IEC 60947-1 600 V signalling circuit certifications CSA 600 V signalling circuit certifications UL
Electrical durability	1.65 Mcycles 25 A AC-3 at $U_e \leq 440\text{ V}$ 1.4 Mcycles 40 A AC-1 at $U_e \leq 440\text{ V}$
Power dissipation per pole	3.2 W AC-1 1.25 W AC-3
Protective cover	With
Interlocking type	Mechanical
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	GOST GL DNV RINA UL CSA BV LROS CCC
Connections - terminals	Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in ² (1.5...10 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in ² (2.5...10 mm ²) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 2 cable(s) 0...0.02 in ² (2.5...10 mm ²) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in ² (1...10 mm ²) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1.5...6 mm ²) - cable stiffness: flexible - with cable end

	Power circuit: screw clamp terminals 2 cable(s) 0...0.02 in ² (2.5...10 mm ²) - cable stiffness: solid - without cable end
Tightening torque	Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 22.12 lbf.in (2.5 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 22.12 lbf.in (2.5 N.m) - on screw clamp terminals - with screwdriver Philips No 2
Operating time	4...19 ms opening 12...22 ms closing
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	15 Mcycles
Operating rate	3600 cyc/h at ≤ 140 °F (60 °C)

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 U _c drop-out at 140 °F (60 °C), AC 50/60 Hz 0.8...1.1 U _c operational at 140 °F (60 °C), AC 50 Hz 0.85...1.1 U _c operational at 140 °F (60 °C), AC 60 Hz
Inrush power in VA	70 VA at 68 °F (20 °C) (cos φ 0.75) 60 Hz 70 VA at 68 °F (20 °C) (cos φ 0.75) 50 Hz
Hold-in power consumption in VA	7.5 VA at 68 °F (20 °C) (cos φ 0.3) 60 Hz 7 VA at 68 °F (20 °C) (cos φ 0.3) 50 Hz
Heat dissipation	2...3 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA signalling circuit
Minimum switching voltage	17 V Signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm signalling circuit
Motor power range AC-3	7...11 kW 380...440 V 3 phases 7...11 kW 480...500 V 3 phases 4...6 kW 200...240 V 3 phases
Motor starter type	Reversing contactor
Contactor coil voltage	110 V AC standard


Environment

IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C) at U _c
Operating altitude	9842.52 ft (3000 m) without derating in temperature
Fire resistance	1562 °F (850 °C) conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor closed 15 Gn for 11 ms Shocks contactor open 8 Gn for 11 ms
Height	3.35 in (85 mm)
Width	3.54 in (90 mm)
Depth	3.62 in (92 mm)
Product weight	1.74 lb(US) (0.787 kg)

Ordering and shipping details

Category	22346 - CTR,D-LINE,OPEN,REVERSING-NEW
Discount Schedule	I12
GTIN	00785901207504
Nbr. of units in pkg.	1
Package weight(Lbs)	2.0800000000000001
Returnability	Y
Country of origin	ID

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0627 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

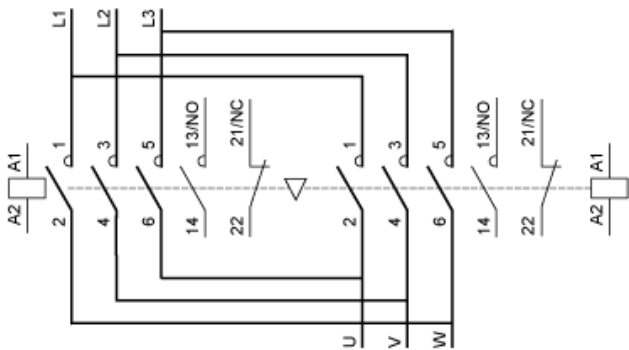
Contractual warranty

Warranty period	18 months
-----------------	-----------



Dimensions

LC2 or 2 x LC1	a	b	c ⁽¹⁾	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	–	–	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	–	–	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	–	–	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	–	–	80
e1 and e2: including cabling.						
(1) With safety cover, without add-on block.						

Wiring



Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power from 9 to 11 kW and 415 VAC

Motor Power (kW)	Icu (kA)	Breaker	Contactor
9	15	GV2ME21	 LC2D25F7
11	15	GV2ME22	 LC2D25F7

Non contractual pictures. Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.